


FlexScan®



Model Variations		With FlexStand, Without Stand	With FlexStand, Without Stand	With FlexStand, Without Stand
Cabinet Color		White, Black	White, Black	White, Black
Panel	Type	IPS	IPS	IPS
	Backlight	LED	LED	LED
	Size	31.5" / 80 cm	27" / 68.5 cm	27" / 68.5 cm
	Native Resolution	3840 × 2160 (16:9 aspect ratio)	3840 × 2160 (16:9 aspect ratio)	2560 × 1440 (16:9 aspect ratio)
	Display Size (H × V)	697.3 × 392.2 mm	596.7 × 335.7 mm	596.7 × 335.7 mm
	Pixel Pitch	0.182 × 0.182 mm	0.155 × 0.155 mm	0.233 × 0.233 mm
	Display Colors	16.77 million	16.77 million	16.77 million
	Viewing Angles (H/V, typ.)	178°, 178°	178°, 178°	178°, 178°
	Brightness (typical)	350 cd/m ²	350 cd/m ²	350 cd/m ²
	Contrast Ratio (typical)	1300:1	1300:1	1000:1
	Response Time (typical)	5 ms (gray-to-gray)	5 ms (gray-to-gray)	5 ms (gray-to-gray)
	Input Terminals	USB Type-C × 1 (with HDCP ¹), DisplayPort 1.2 × 1 (with HDCP ¹), HDMI x2 (with HDCP)	USB Type-C × 1 (with HDCP ¹), DisplayPort 1.2 × 1 (with HDCP ¹), HDMI × 2 (with HDCP)	USB Type-C × 1 (with HDCP), DisplayPort × 1 (with HDCP), HDMI × 1 (with HDCP)
Video Signals	Digital (H, V)	USB Type-C: 31 - 134 kHz, 29 - 31 Hz and 59 - 61 Hz DisplayPort: 31 - 134 kHz, 29 - 31 Hz and 59 - 61 Hz HDMI: 31 - 135 kHz, 29 - 31 Hz, and 49 - 61 Hz	USB Type-C: 31 - 134 kHz, 29 - 31 Hz and 59 - 61 Hz DisplayPort: 31 - 134 kHz, 29 - 31 Hz and 59 - 61 Hz HDMI: 31 - 135 kHz, 29 - 31 Hz, and 49 - 61 Hz	USB Type-C: 31 - 89 kHz, 29 - 31 Hz, 59 - 61 Hz DisplayPort: 31 - 89 kHz, 59 - 61 Hz HDMI: 31 - 89 kHz, 29 - 31 Hz, 49 - 51 Hz and 59 - 61 Hz
	Analog (H, V)	-	-	-
	Sync Formats	-	-	-
	Function	1 port for upstream (USB Type-C) 2-port USB hub (including 1 USB battery charge port)	1 port for upstream (USB Type-C) 2-port USB hub (including 1 USB battery charge port)	1 port for upstream (USB Type-C) 2-port USB hub
USB	Standard	USB 3.1 Gen 1, USB BC 1.2	USB 3.1 Gen 1, USB BC 1.2	USB 3.1 Gen 1
	Speakers	1.0 W +1.0 W	1.0 W +1.0 W	1.0 W +1.0 W
Audio	Input Terminals	-	-	-
	Output Terminals	3.5 mm headphone jack	3.5 mm headphone jack	3.5 mm headphone jack
Power	Sound Adjustment	Volume	Volume	Volume
	Power Requirements	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz
	Max. Power Consumption	163 W	163 W	96 W
	Typ. Power Consumption	32 W	31 W	23 W
Features & Functions	Power Save Mode	0.5 W or less	0.5 W or less	0.5 W or less
	Preset Modes	Color mode (Paper, Movie, sRGB, User1, User2, DICOM)	Color mode (Paper, Movie, sRGB, User1, User2, DICOM)	Color mode (Paper, Movie, sRGB, User1, User2)
	Auto EcoView	Yes	Yes	Yes
	EcoView Sense	-	-	-
Physical Specifications	Dimensions (W × H × D)	717.4 × 427.3 - 576.2 × 230 mm	611.4 × 367.3 - 545.2 × 230 mm	611.6 × 390.2 - 545.2 × 245 mm
	Dimensions (Without Stand, W × H × D)	717.4 × 416.3 × 51.5 mm	611.4 × 356.3 × 50 mm	611.6 × 359 × 48.5 mm
	Net Weight	11 kg / 24.3 lbs	8.2 kg / 18.1 lbs	8.1 kg / 17.9 lbs
	Net Weight (Without Stand)	7.6 kg / 16.8 lbs	4.9 kg / 10.8 lbs	5.3 kg / 11.7 lbs
	Height Adjustment Range	148.9 mm	177.9 mm	155 mm
	Tilt	35° Up, 5° Down	35° Up, 5° Down	35° Up, 5° Down
	Swivel	344°	344°	344°
	Pivot	-	90° (clockwise)	90° (both clockwise and counter clockwise)
	Hole Spacing (VESA Std.)	100 × 100 mm	100 × 100 mm	100 × 100 mm
Certifications & Standards (Please contact EIZO for the latest information.)		TCO Displays 7, EPEAT Gold (US), TUV/ Ergonomics, TUV/Low Blue Light Content, TUV/Flicker Free, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, PSE, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade3, EAC	TCO Displays 7, EPEAT Gold (US), TUV/ Ergonomics, TUV/Low blue light content, TUV/Flicker Free, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC	TCO Displays 7, EPEAT Gold (US), TUV/ Ergonomics, TUV/Low Blue Light Content, TUV/Flicker Free, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC
Supplied Accessories (May vary by country. Please contact EIZO for details.)		AC power cord, signal cable (USB Type-C - USB Type-C, DisplayPort - DisplayPort, HDMI - HDMI), cable cover, Screw for VESA mount x4, setup guide	AC power cord, signal cable (USB Type - C - USB Type - C, DisplayPort - DisplayPort, HDMI - HDMI) setup guide, cable cover	AC power cord, signal cable (USB Type - C - USB Type-C), CD-ROM (PDF user's manual), setup guide
Warranty		Five Years	Five Years	Five Years
Zero Bright Pixels ²		Yes	Yes	Yes
Dimension Diagrams (Unit:mm)				

With current LCD technology, a panel may contain a limited number of missing or flickering pixels. If the monitor is left on continuously over a long period of time, dark smudges or burn-in may appear. To maximize the life of the monitor, we recommend the monitor be turned off periodically. ¹ HDCP 2.2 is not supported. ² 6 months from the date of purchase. ³ The stand's height surpasses the screen.

Frameless

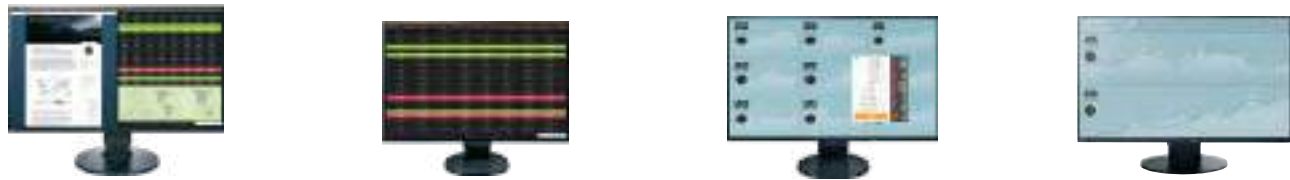

Model Variations		With FlexStand, Without Stand	With FlexStand, Without Stand	With FlexStand, Without Stand	With FlexStand, Without Stand
Cabinet Color		White, Black	White, Black	White, Black	White, Gray, Black
Panel	Type	IPS	IPS	IPS	IPS
	Backlight	LED	LED	LED	LED
	Size	27" / 68.5 cm	24.1" / 61.1 cm	23.8" / 60.4 cm	23.8" / 60 cm
	Native Resolution	2560 × 1440 (16:9 aspect ratio)	1920 × 1200 (16:10 aspect ratio)	1920 × 1080 (16: 9 aspect ratio)	1920 × 1080 (16: 9 aspect ratio)
	Display Size (H × V)	596.7 × 335.7 mm	518.4 × 324 mm	527 × 296.5 mm	527 × 296.5 mm
	Pixel Pitch	0.233 × 0.233 mm	0.270 × 0.270 mm	0.275 × 0.275 mm	0.275 × 0.275 mm
	Display Colors	16.77 million	16.77 million	16.77 million	16.77 million
	Viewing Angles (H/V, typ.)	178°, 178°	178°, 178°	178°, 178°	178°, 178°
	Brightness (typical)	350 cd/m ²	350 cd/m ²	250 cd/m ²	250 cd/m ²
	Contrast Ratio (typical)	1000:1	1000:1	1000:1	1000:1
	Response Time (typical)	5 ms (gray-to-gray)	5 ms (gray-to-gray)	5 ms (gray-to-gray)	5 ms (gray-to-gray)
	Input Terminals	DisplayPort × 1 (with HDCP), DVI-D 24 pin × 1 (with HDCP), HDMI × 1 (with HDCP)	D-Sub mini 15 pin × 1, DVI-D 24 pin × 1 (with HDCP), HDMI × 1 (with HDCP), DisplayPort × 1 (with HDCP)	D-Sub mini 15 pin × 1, DVI-D 24 pin × 1 (with HDCP), HDMI × 1 (with HDCP), DisplayPort × 1 (with HDCP)	D-Sub mini 15 pin × 1, DVI-D 24 pin × 1 (with HDCP), HDMI × 1 (with HDCP), DisplayPort × 1 (with HDCP)
Video Signals	Digital (H, V)	DVI: 31 - 89 kHz, 29 - 31 Hz and 59 - 61 Hz DisplayPort: 31 - 89 kHz, 59 - 61 Hz HDMI: 31 - 89 kHz, 49 - 61 Hz	DVI: 31 - 76 kHz, 59 - 61 Hz DisplayPort: 31 - 76 kHz, 59 - 61 Hz HDMI: 15 - 76 kHz, 49 - 51 Hz and 59 - 61 Hz	DVI: 31 - 68 kHz, 59 - 61 Hz DisplayPort: 31 - 68 kHz, 59 - 61 Hz HDMI: 15 - 68 kHz, 49 - 51 Hz and 59 - 61 Hz	DVI: 31 - 68 kHz, 59 - 61 Hz DisplayPort: 31 - 68 kHz, 59 - 61 Hz HDMI: 15 - 68 kHz, 49 - 61 Hz
	Analog (H, V)	-	31 - 81 kHz, 55 - 76 Hz	31 - 81 kHz, 55 - 76 Hz	31 - 81 kHz, 55 - 76 Hz
	Sync Formats	-	Separate	Separate	Separate
	Function	1 port for monitor control 2-port USB hub	1 port for monitor control 2-port USB hub	1 port for monitor control 2-port USB hub	1 port for monitor control 2-port USB hub
USB	Standard	USB 3.0	USB 3.0	USB 3.0	USB 3.0
	Speakers	1.0 W +1.0 W	1.0 W +1.0 W	1.0 W +1.0 W	1.0 W +1.0 W
Audio	Input Terminals	3.5 mm stereo jack	3.5 mm stereo jack	3.5 mm stereo jack	3.5 mm stereo jack
	Output Terminals	3.5 mm stereo jack	3.5 mm stereo jack	3.5 mm stereo jack	3.5 mm stereo jack
Power	Sound Adjustment	Volume, Source (DisplayPort, HDMI)	Volume, Source (DisplayPort, HDMI)	Volume, Source (DisplayPort, HDMI)	Volume, Source (DisplayPort, HDMI)
	Power Requirements	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz
	Max. Power Consumption	67 W	44 W	42 W	44 W
	Typ. Power Consumption	22 W	11 W	13 W	11 W
Features & Functions	Power Save Mode	0.5 W or less	0.5 W or less	0.5 W or less	0.3 W or less
	Preset Modes	Color mode (Paper, Movie, sRGB, User1, User2, DICOM)	Color mode (Paper, Movie, sRGB, User1, User2, DICOM)	Color mode (Paper, Movie, sRGB, User1, User2, DICOM)	Color mode (Paper, Movie, sRGB, User1, User2, DICOM)
	Auto EcoView	Yes	Yes	Yes	Yes
	EcoView Sense	-	-	-	Yes
Physical Specifications	Dimensions (W × H × D)	611.6 × 390.2 - 545.2 × 245 mm	531 × 351.4 - 510.1 × 190 mm	537.7 × 322.7 ³ - 495.4 × 190 mm	537.6 × 368 ³ - 473.5 × 233 mm
	Dimensions (Without Stand, W × H × D)	611.6 × 359 × 48.5 mm	531 × 341.9 × 45.5 mm	537.7 × 313.1 × 45.5 mm	537.6 × 317.6 × 47.9 mm
	Net Weight	7.9 kg / 17.4 lbs	5.7 kg / 12.6 lbs	5.5 kg / 12.1 lbs	6.2 kg / 13.7 kg
	Net Weight (Without Stand)	5.1 kg / 11.2 lbs	3.7 kg / 8.2 lbs	3.5 kg / 7.7 lbs	3.8 kg / 8.4 lbs
	Height Adjustment Range	155 mm	158.6 mm	172.7 mm	140 mm
	Tilt	35° Up, 5° Down	35° Up, 5° Down	35° Up, 5° Down	35° Up, 5° Down
	Swivel	344°	344°	344°	344°
	Pivot	90° (both clockwise and counter clockwise)	90° (both clockwise and counter clockwise)	90° (both clockwise and counter clockwise)	90° (both clockwise and counter clockwise)
	Hole Spacing (VESA Std.)	100 × 100 mm	100 × 100 mm	100 × 100 mm	100 × 100 mm
Certifications & Standards (Please contact EIZO for the latest information.)		TCO Certified Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/Low Blue Light Content, TUV/Flicker Free, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC	TCO Certified Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC	TCO Certified Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/Low Blue Light Content, TUV/Flicker Free, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC	TCO Certified Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/Low Blue Light Content, TUV/Flicker Free, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC
Supplied Accessories (May vary by country. Please contact EIZO for details.)		AC power cord, signal cables (DisplayPort - DisplayPort), USB cable, EIZO LCD Utility Disk (PDF user's manual), setup guide	AC power cord, signal cable (DisplayPort - DisplayPort), USB cable, cable cover, CD - ROM (PDF user's manual), setup guide	AC power cord, signal cable (DisplayPort - DisplayPort), USB cable, cable cover, CD-ROM (PDF user's manual), setup guide	AC power cord, signal cable (DisplayPort - DisplayPort), USB cable (may not be supplied in some countries), EIZO LCD Utility Disk (PDF user's manual), setup guide
Warranty		Five Years	Five Years	Five Years	Five Years
Zero Bright Pixels ²		Yes	Yes	Yes	Yes
Dimension Diagrams (Unit:mm)					

FlexScan®



Model Variations		-	-	-
Cabinet Color		Gray, Black	Gray, Black	Gray, Black
Panel	Type	IPS	TN	TN
	Backlight	LED	LED	LED
	Size	24.1" / 61.1 cm	23" / 58 cm	22" / 56 cm
	Native Resolution	1920 × 1200 (16:10 aspect ratio)	1920 × 1080 (16:9 aspect ratio)	1680 × 1050 (16:10 aspect ratio)
	Display Size (H × V)	518.4 × 324mm	509.8 × 286.7 mm	473.7 × 296.1 mm
	Pixel Pitch	0.270 × 0.270 mm	0.265 × 0.265 mm	0.282 × 0.282 mm
	Display Colors	16.77 million	16.77 million	16.77 million
	Viewing Angles (H/V, typ.)	178°, 178°	170°, 160°	170°, 178°
	Brightness (typical)	300 cd/m²	250 cd/m²	250 cd/m²
	Contrast Ratio (typical)	1000:1	1000:1	1000:1
Video Signals	Response Time (typical)	5 ms (gray-gray)	5 ms (black-white-black)	5 ms (black-white-black)
	Input Terminals	D-Sub mini 15 pin × 1, DVI-D 24 pin × 1 (with HDCP), DisplayPort × 1 (with HDCP)	D-Sub mini 15 pin × 1, DVI-D 24 pin × 1 (with HDCP), DisplayPort × 1 (with HDCP)	D-Sub mini 15 pin × 1, DVI-D 24 pin × 1 (with HDCP), DisplayPort × 1 (with HDCP)
	Digital (H, V)	31 - 76 kHz, 59 - 61 Hz	DisplayPort: 31 - 67.5 kHz, 59 - 61 Hz DVI: 31 - 68 kHz, 59 - 61 Hz	DisplayPort: 31 - 67.5 kHz, 59 - 61 Hz DVI: 31 - 68 kHz, 59 - 61 Hz
	Analog (H, V)	31 - 76 kHz, 55 - 61 Hz	31 - 68 kHz, 55 - 61 Hz	31 - 68 kHz, 55 - 61 Hz
	Sync Formats	Separate	Separate	Separate
USB	Function	1 port for monitor control 2-port USB hub	1 port for monitor control 2-port USB hub	1 port for monitor control 2-port USB hub
	Standard	USB 2.0	USB 2.0	USB 2.0
Audio	Speakers	1.0 W +1.0 W	1.0 W +1.0 W	1.0 W +1.0 W
	Input Terminals	3.5 mm stereo jack	3.5 mm stereo jack	3.5 mm stereo jack
	Output Terminals	3.5 mm headphone jack	3.5 mm headphone jack	3.5 mm headphone jack
	Sound Adjustment	Volume, Power Save, Source (DisplayPort)	Volume, Power Save, Source (DisplayPort)	Volume, Power Save, Source (DisplayPort)
Power	Power Requirements	AC 100 - 240 V, 50 / 60 Hz	AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz	AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz
	Max. Power Consumption	36 W	37 W	39 W
	Typ. Power Consumption	12 W	10 W	12 W
	Power Save Mode	0.3 W or less	0.3 W or less	0.3 W or less
Features & Functions	Preset Modes	Color mode (Paper, Movie, sRGB, User1, User2)	FineContrast (Paper, Movie, sRGB, User1, User2)	FineContrast (Paper, Movie, sRGB, User1, User2)
	Auto EcoView	Yes	Yes	Yes
	EcoView Sense	Yes	Yes	Yes
Physical Specifications	Dimensions (W × H × D)	552.5 × 368 - 499 × 233 mm	540 × 368 ³ - 478.5 × 233 mm	500 × 368 ³ - 483.1 × 233 mm
	Dimensions (Without Stand, W × H × D)	552.5 × 358 × 56.9 mm	540 × 317.5 × 56 mm	500 × 326.5 × 54 mm
	Net Weight	6.7 kg / 14.8 lbs	5.9 kg / 13 lbs	5.6 kg / 12.3 lbs
	Net Weight (Without Stand)	4.3 kg / 9.5 lbs	3.5 kg / 7.7 lbs	3.3 kg / 7.3 lbs
	Height Adjustment Range	131 mm	140 mm	140 mm
	Tilt	35° Up, 5° Down	35° Up, 5° Down	35° Up, 5° Down
	Swivel	344°	344°	344°
	Pivot	90° (clockwise)	90° (clockwise)	90° (clockwise)
	Hole Spacing (VESA Std.)	100 × 100 mm	100 × 100 mm	100 × 100 mm
	Certifications & Standards (Please contact EIZO for the latest information.)	TCO Certified Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/Low Blue Light Content, TUV/Flicker Free, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, PSE, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade2, EAC	TCO Certified Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/Low Blue Light Content, TUV/Flicker Free, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC	TCO Certified Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/Low Blue Light Content, TUV/Flicker Free, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC
Supplied Accessories (May vary by country. Please contact EIZO for details.)		AC power cord, signal cables (DVI-D - DVI-D, DisplayPort - DisplayPort), setup guide, screw for VESA mount x4 (EV2430-F)	AC power cord, signal cables (DVI-D - DVI-D, DisplayPort - DisplayPort), EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], EIZO ScreenSlicer software), setup guide	AC power cord, signal cables (DVI-D - DVI-D, DisplayPort - DisplayPort), EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], EIZO ScreenSlicer software), setup guide
Warranty		Five Years	Five Years	Five Years
Zero Bright Pixels ²		Yes	-	-
Dimension Diagrams (Unit:mm)				

With current LCD technology, a panel may contain a limited number of missing or flickering pixels. If the monitor is left on continuously over a long period of time, dark smudges or burn-in may appear. To maximize the life of the monitor, we recommend the monitor be turned off periodically. ¹ HDCP 2.2 is not supported. ² 6 months from the date of purchase. ³ The stand's height surpasses the screen.

Square				
EV2730Q	S2133	S1934	S1703-A	S1503-A
With FlexStand, Without Stand	With Height Adjustable Stand, Without Stand	With Height Adjustable Stand, With Tilt Stand, Without Stand	With Height Adjustable Stand, With Tilt Stand, Without Stand	-
Gray, Black	Gray, Black	Gray, Black	Gray, Black	Gray, Black
IPS	IPS	IPS	TN	TN
LED	LED	LED	LED	LED
26.5" / 67 cm	21.3" / 54 cm	19" / 48 cm	17" / 43.3 cm	15" / 38 cm
1920 × 1920 (1:1 aspect ratio)	1600 × 1200 (4:3 aspect ratio)	1280 × 1024 (5:4 aspect ratio)	1280 × 1024 (5:4 aspect ratio)	1024 × 768 (4:3 aspect ratio)
475.7 × 475.7 mm	432 × 324 mm	374.8 × 299.8 mm	337.9 × 270.3 mm	304.1 × 228.1 mm
0.248 × 0.248 mm	0.270 × 0.270 mm	0.293 × 0.293 mm	0.264 × 0.264 mm	0.297 × 0.297 mm
16.77 million	16.77 million	16.77 million	16.77 million	16.77 million
178°, 178°	178°, 178°	178°, 178°	170°, 160°	160°, 160°
300 cd/m²	420 cd/m²	250 cd/m²	250 cd/m²	400 cd/m²
1000:1	1500:1	1000:1	1000:1	600:1
5 ms (gray-to-gray)	6 ms (gray-to-gray)	14 ms (gray-to-gray)	5 ms (black-white-black)	8 ms (black-white-black)
DisplayPort × 1 (with HDCP), DVI-D 24 pin × 1 (with HDCP)	D-Sub mini 15 pin × 1, DVI-D 24 pin × 1 (with HDCP), DisplayPort × 1 (with HDCP)	D-Sub mini 15 pin × 1, DVI-D 24 pin × 1 (with HDCP), DisplayPort × 1 (with HDCP)	D-Sub mini 15 pin, DVI-D 24 pin	D-Sub mini 15 pin × 1, DVI-D 24 pin × 1
31 - 127 kHz, 59 - 61 Hz	31 - 76 kHz, 59 - 61 Hz	31 - 64 kHz, 59 - 61 Hz	31 - 64 kHz, 59 - 61 Hz	31 - 49 Hz, 59 - 61 Hz
-	24 - 80 kHz, 49 - 76 Hz	31 - 64 kHz, 55 - 61 Hz	31 - 64 kHz, 55 - 61 Hz	31 - 49 kHz, 55 - 61 kHz
-	Separate, Composite	Separate	Separate	Separate
1 port for monitor control 2-port USB hub	1 port for monitor control 2-port USB hub	-	-	-
USB 2.0	USB 2.0	-	-	-
1.0 W +1.0 W	-	0.5 W + 0.5 W	0.5 W + 0.5 W	0.5 W + 0.5 W
3.5 mm stereo jack	-	3.5 mm stereo jack	3.5 mm stereo jack	3.5 mm stereo jack
3.5 mm headphone jack	-	3.5 mm headphone jack	3.5 mm headphone jack	-
Volume, Power Save, Source (DisplayPort)	-	Volume, Source (DisplayPort)	Volume	Volume
AC 100 - 240 V, 50 / 60 Hz	AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz	AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz	AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz	AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz
64 W	45 W	21 W	25 W	16 W
25 W	13 W	9 W	8 W	5 W
0.5 W or less	0.3 W or less	0.5 W or less	0.5 W or less	0.5 W or less
FineContrast (Paper, Movie, sRGB, User1, User2)	FineContrast (Paper, Movie, sRGB, User1, User2)	Color mode (Paper, sRGB, User1, User2, DICOM)	User1, User2, sRGB, Paper	User1, User2, sRGB, Paper
Yes	Yes	Yes	Yes	Yes
-	-	-	-	-
497 × 512.5 - 613.5 × 245 mm	465 × 453 - 535 × 208.5 mm	With Height Adjustable Stand: 405 × 406.5 - 506.5 × 205 mm With Tilt Stand: 405 × 414 × 205 mm	With Height Adjustable Stand: 367 × 391.5 - 491.5 × 205 mm With Tilt Stand: 367 × 384 × 188 mm	346 × 349 × 157 mm
497 × 501.5 × 56 mm	465 × 361 × 64 mm	405 × 334 × 61.5 mm	367 × 304 × 59 mm	346 × 280 × 69 mm
7.1 kg / 15.7 lbs	8.6 kg / 19 lbs	With Height Adjustable Stand: 5.6 kg / 12.3 lbs With Tilt Stand: 4.6 kg / 10.1	With Height Adjustable Stand: 5.5 kg / 12.1 lbs With Tilt Stand: 4.4 kg / 9.7 lbs	4.7 kg / 10.4 lbs
4.2 kg / 9.3 lbs	5.6 kg / 12.3 lbs	3.8 kg / 8.3 lbs	3.6 kg / 7.9 lbs	3.4 kg / 7.5 lbs
101 mm	82 mm	With Height Adjustable Stand: 100 mm With Tilt Stand: 0 mm	With Height Adjustable Stand: 100 mm With Tilt Stand: 0 mm	-
35° Up, 5° Down	40° Up, 0° Down	With Height Adjustable Stand: 30° Up, 0° Down With Tilt Stand: 30° Up, 5° Down	With Height Adjustable Stand: 30° Up, 0° Down With Tilt Stand: 30° Up, 5° Down	30° Up, 0° Down
344°	35° Right / 35° Left	With Height Adjustable Stand: 35° Right / 35° Left With Tilt Stand: 0°	With Height Adjustable Stand: 35° - Right / 35° Left With Tilt Stand: 0°	-
-	90° (clockwise)	With Height Adjustable Stand: 90° (clockwise) With Tilt Stand: -	With Height Adjustable Stand: 90° (clockwise) With Tilt Stand: -	-
100 × 100 mm	100 × 100 mm	100 × 100 mm	100 × 100 mm	100 × 100 mm
TUV/Ergonomics, TUV/Low Blue Light Content, TUV/Flicker Free, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, VCCI-B, RoHS, WEEE, China RoHS, CCC, EAC	TCO Certified Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC	TCO Certified Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC	TUV/Ergonomics, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, VCCI-B, RoHS, WEEE, China RoHS, CCC, EAC	TUV/Ergonomics, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, VCCI-B, RoHS, WEEE, China RoHS, CCC, EAC
AC power cord, signal cables (DVI-D - DVI-D [dual link supported]), DisplayPort - DisplayPort), EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], EIZO ScreenSlicer software), setup guide	AC power cord, signal cables (DVI-D - DVI-D, D-Sub - D-Sub), USB cable, EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], EIZO ScreenSlicer software)	AC power cord, signal cables (D-Sub - D-Sub, DVI-D - DVI-D), audio cable, setup guide, CD-ROM (PDF user's manual)	AC power cord, signal cables (D-Sub - D-Sub, DVI-D - DVI-D), audio cable, setup guide, 4 screws for mount option	AC power cord, signal cables (DVI-D - DVI-D, D-Sub mini 15 pin - D-Sub mini 15 pin), setup guide, 4 screws for mount option (S1503-AF)
Five Years	Five Years	Five Years	Five Years	Five Years
Yes	-	-	-	-